

AD-2000 CCD Armor Dome Camera



Installation Manual

Indoor/Outdoor Vandal-Resistant
CCD Armor Dome 480 TVL Camera
w/ 3.6mm Wide-Angle Lens

**For Warranty Registration, visit
<http://Platinum-CCTV.com>**

Camera Installation

1. Camera Mounting:


Items Needed:

Screwdriver, Drill, Mounting Hardware (not included), Glove or Cloth for moving Dome, Pencil

a. Remove Dome



b. Mark wall through Mounting Holes

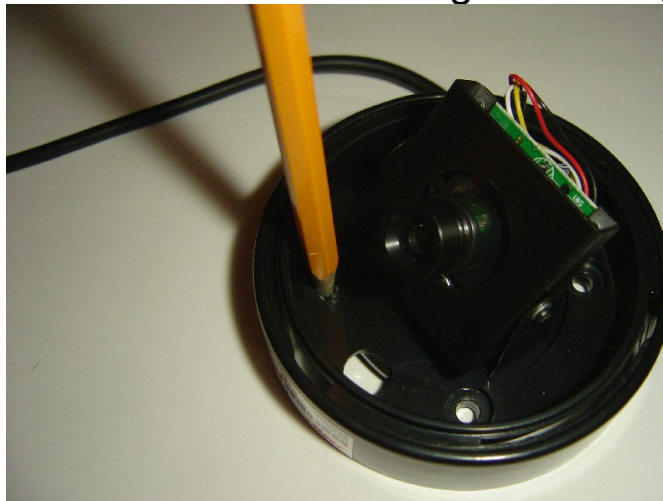

c. Drill Holes for mounting

d. Drill Hole for Cables

Camera Installation

e. Connect Cables



Top = BNC Video Connector
Bottom = Power Connector

- f. Insert Drywall Anchors (Drywall Mounting Only *Not Included)
- g. Insert Screws
- h. Adjust camera angle to suit needs
- i. Reinstall Dome



Platinum CCTV Surveillance Solutions

AD-2000 CCD Color Dome Camera	
Image Sensor	Sony 1/3" CCD Sensor
Number of Pixels	NTSC: 620 (H) x 492 (V)
Lens	3.6mm (~92 degrees)
Sync System	Internal Synchronization
Resolution	480 TVL
Dimensions	108mm (D) x 74mm (H)
Video Output	1.0Vp-p75Ω
S/N Ratio	>50 dB
Shutter Time	1/60-1/100,000 Sec.
Operation Temp.	32°F ~ +122°F
Storage Temp.	23°F ~ +131°F
Useable Illumination	0.5 Lux (F:1.2)
Power Source	DC 12V 135 mA

Installation Notes	
<ul style="list-style-type: none">• For Indoor & Outdoor Use• Disassembly of camera is not recommended• Handle lens carefully with gloves to prevent damage from oil on your hands• Handle with care• To prevent shock, do not plug in camera with dome removed• Never touch lens directly• Clean the dome occasionally with a dry micro-fiber cloth, or plastic cleaner only – Do not use abrasive-type cleaners as they will scratch dome	